








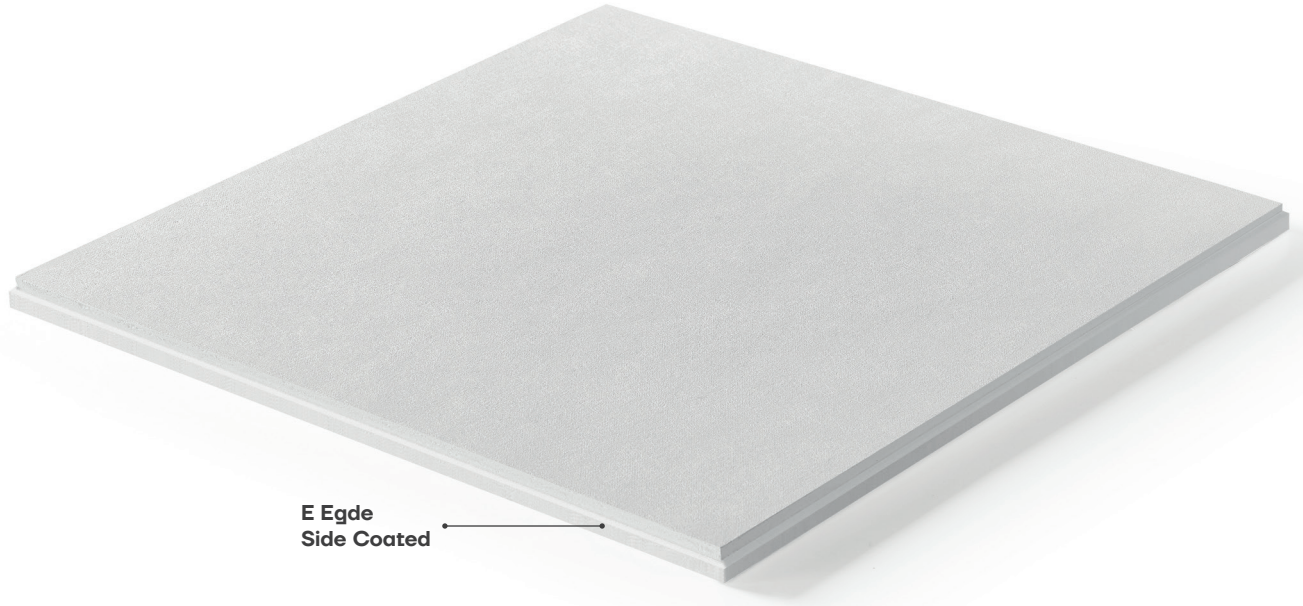

**DECLARATION OF PERFORMANCE**  
SUSPENDED CEILING "SOFTWOOL" (DOP)





E Edge  
Side Coated


- 1. Identification code of the product type:**  
Stonewool Board with Micro-Textured Fiberglass covered.
- 2. Type, batch or serial number or any other element allowing identification of the construction product:**  
Stonewool Board, 130 kg/m<sup>3</sup> and 15 mm
- 3. Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer:**  
Thermal, Acoustic, Moisture, Fire insulation material
- 4. Name and address of the manufacturer:**  
TROMER ENERJİ A.Ş. Sultansazı O.S.B. Mah. 2.cad. No: 20 İncesu - Kayseri / TURKEY
- 5. Name and address of the authorized representative:**  
Tamer Şinik / TROMER ENERJİ A.Ş. Sultansazı O.S.B. Mah. 2.cad. No: 20 İncesu - Kayseri / TURKEY
- 6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V:**  
System 3
- 7. In case of the declaration of performance concerning a construction product covered by a harmonised standard:**  
Efectis Era Avrasya Test ve Belgelendirme A.Ş. accredited by TÜRKAK under registration number AB-0556-T for EN ISO/IEC 17025:2017 as test laboratory.
- 8. ( INTERNAL CEILING BOARD )** The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 8 This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

	Essential Characteristic	Performance	Harmonized Technical Spec.
	Reaction to fire to Class	+A1	TS EN 13964:2014
	Emission of hazardous substances for indoor environments (ZA)	Mineral stone wool does not provide nutrients for microorganisms.	
	Environmental Impact	Recyclable Material	
	Sound Absorption	$\alpha_w$ : 0.95	
	Moisture and Sagging Resistance	Provides protection in high humidity	
	Light Reflection	86%	
	Thermal Conductivity (EN 12667)	Max.0,035 W/Mk	TS EN 12086
	Cleanroom compatibility	Class:ISO 4( $\geq 0,5 \mu m$ )	ISO 14644-1

## SOUND ABSORPTION

Sound Absorption Class

$\alpha_w$ : 0.95 (Class A)

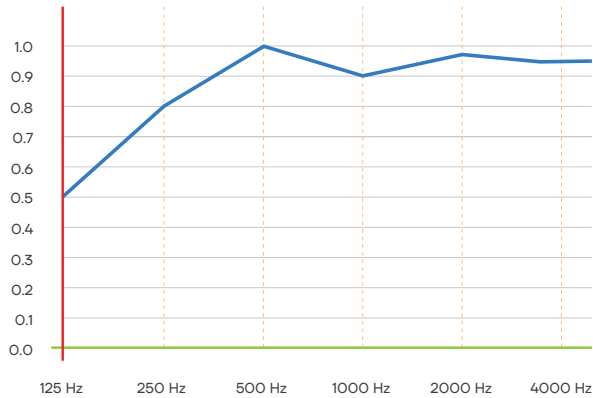

KYRA

	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	$\alpha_w$	Absorption Class	NRC
A: 15/200	0.50	0.85	1.00	0.90	0.98	0.95	0.95	A	0.90

Signed for and on behalf of the manufacturer by

Name And Function

Tamer Şinik

Place And Date Of Issue

KAYSERİ / 2025

Signature